FIG. 1

의~

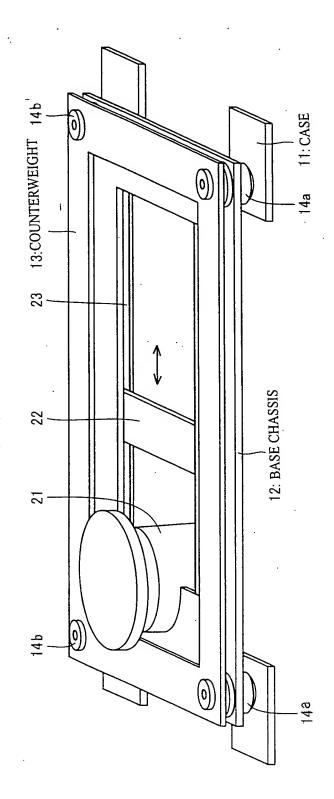


FIG. 2

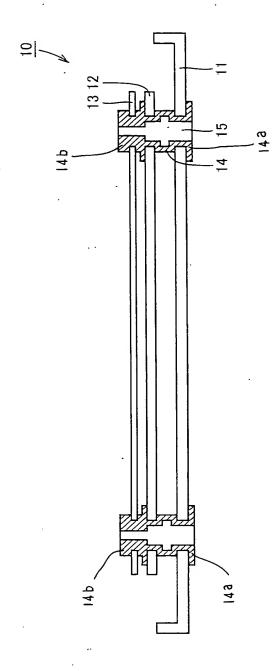



FIG. 3



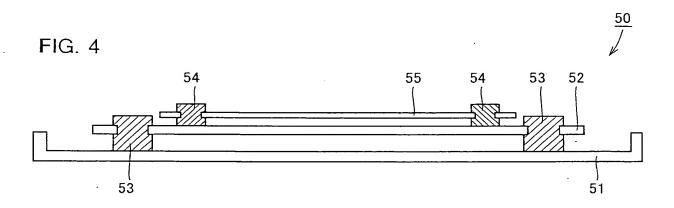



FIG. 5



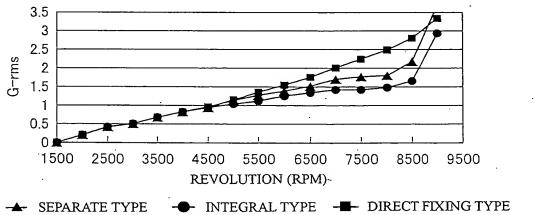



FIG. 6




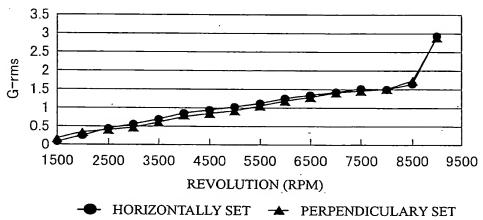


FIG. 7

5500rpm vs 8000rpm/TRACKING AMOUNT OF UNBLANCE MASS: 1.0g-cm 3.5 .3 2.5 2 1.5 1 0.5 1500 2500 3500 4500 5500 6500 7500 | 8500 8000 REVOLUTION (RPM) 5500rpm 8000rpm DIRECT FIXING TYPE

FIG. 8

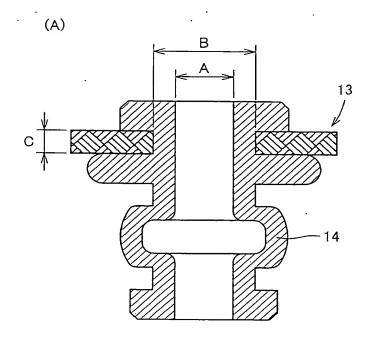

(B)

unit:mm

	DIMENSION B	DEMENSION C	DIMENSION (B-A)/2
COUNTERWEIGHT	φ6	1.5	
5500rpm	φ6	1.5	1.25
8000rpm	φ 6.1	1.5	1.8